


Polyamide Bowls

Polyamide bowls have low friction and can be specially machined to customer's specifications and are easily reproduced. They also have a low noise level.

Stepped polyamide bowls (TKF) and conical polyamide bowls (KKF) are available.

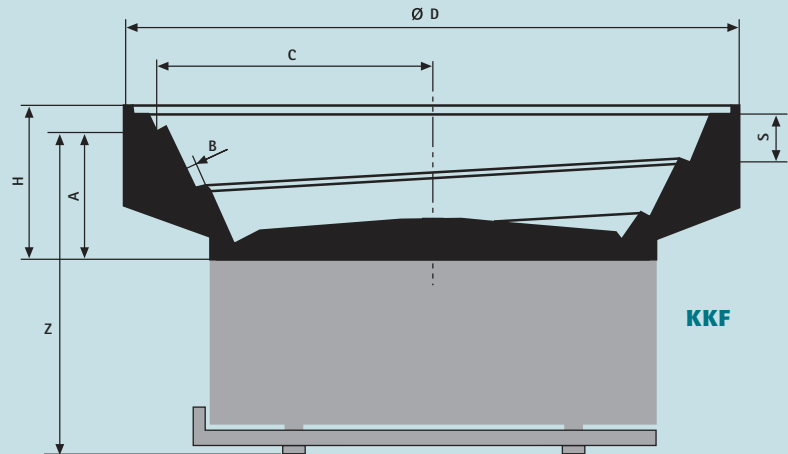

Please advise feed direction when ordering (see also page 5).

Type	KKF-Z 100-X-40	KKF-Z 200-X-60	KKF-ZA 250-X-120	TKF-Z 100-X-40	TKF-Z 200-X-60	TKF-ZA 250-X-120
Capacity [l]*	0.15	0.5	2.4	0.15	0.5	2.4
Material	PA 6-G	PA 6-G	PA 6-G	PA 6-G	PA 6-G	PA 6-G
A = Discharge height **	28-32	47-50	102-106	28-32	47-50	105-109
B = Width of track	2-10	2-10	2-10	2-10	2-10	2-10
C = Discharge radius **	38-45	97-100	175-185	38-45	96-105	175-185
D = Bowl diameter	120	220	400	120	220	400
H = Bowl height	40	60	120	40	60	120
S = Track pitch	12	20	28	12	20	36
Fixing	central	central	central	central	central	central
Suitable drive unit	SRC-N 100	SRC-N 200	SRC-N 250	SRC-N 100	SRC-N 200	SRC-N 250
(see also page 14)						
Z = Total discharge height	110-120	210-220	320-325	110-120	210-220	320-325
Suitable base plate	-	SRG-N 200	SRG-N 250	-	SRG-N 200	SRG-N 250
(see also page 19)						

* Larger capacities available, dependent on application and components

** Varied according to track width

Special sizes on request



The measurements mentioned above are valid for standard equipment only without tooled devices.
Subject to manufacturing tolerances.

